



Customize and taste life

Lighting gives architecture life and gives space to the soul. Interior lighting design focuses on inter architecture, people-oriented, harmonious and natural space design concept.

According to different functional requirements, appropriate lamps, light sources, color temperature and beam angle are adopted and combined with intelligent lighting control system to adjust the comfortable lighting visual environment.



ontents

■ COMPANY PROFILE	P03-P04
■ PRODUCT LIST	P05-P10
■ LIGHTING DESIGN PLAN	P11-P16
■ LED MAGNETIC TRACK LIGHT	P17-P32
■ LED SPOT LIGHT	P33-P38
■ LED BLUE SKY LIGHT	P39-P40
■ LED STAIR LIGHT	P41-P43
■ LED WALL LIGHT	P44-P46
■ LED LIVING ROOM PENDANT LIGHT	P47-P49
■ LED DINNING-HALL PENDANT LIGHT	P50-P52
■ LED BEDSIDE LIGHT	P53-P54
■ LED STAIR PENDANT LIGHT	P55-P56
■ LED CELLING LIGHT	P57-P58
■ LED ALUMINUM LINE LAMP	P59-P60
■ LED GROUND LIGHT	P63-P64
■ LED GROUND BURIED LIGHT	P65-P66
■ LED UNDERWATER LIGHT	P67-P69
■ LED LAWN LIGHT	P70-P72
■ LED SOLAR STREET LIGHT	P73-P74



LED ULTRA-THIN MAGNETIC TRACK LIGHT




LED MAGNETIC TRACK LIGHT



LED SPOT LIGHT



LED BLUE SKY LIGHT

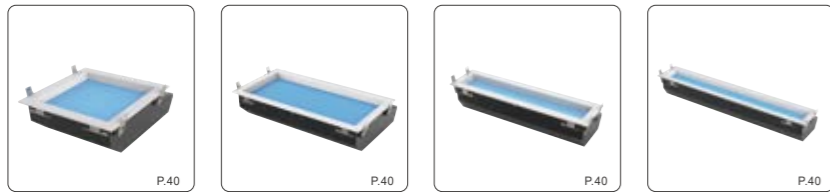


LED STAIR LIGHT



LED WALL LIGHT




LED LIVING ROOM PENDANT LIGHT

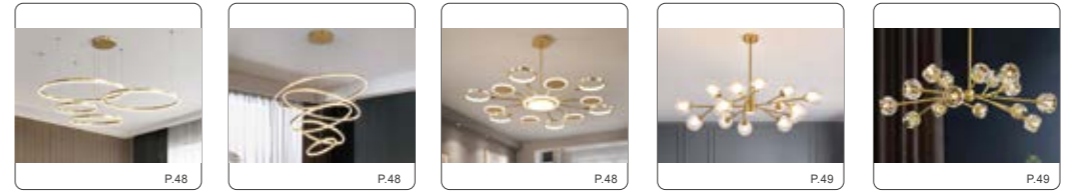

LED DINNING HALL PENDANT LIGHT



LED BEDSIDE LIGHT

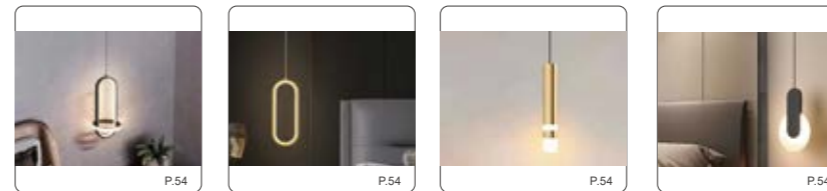


LED STAIR PENDANT LIGHT



LED CEILING LIGHT



ALUMINUM LINE LIGHT

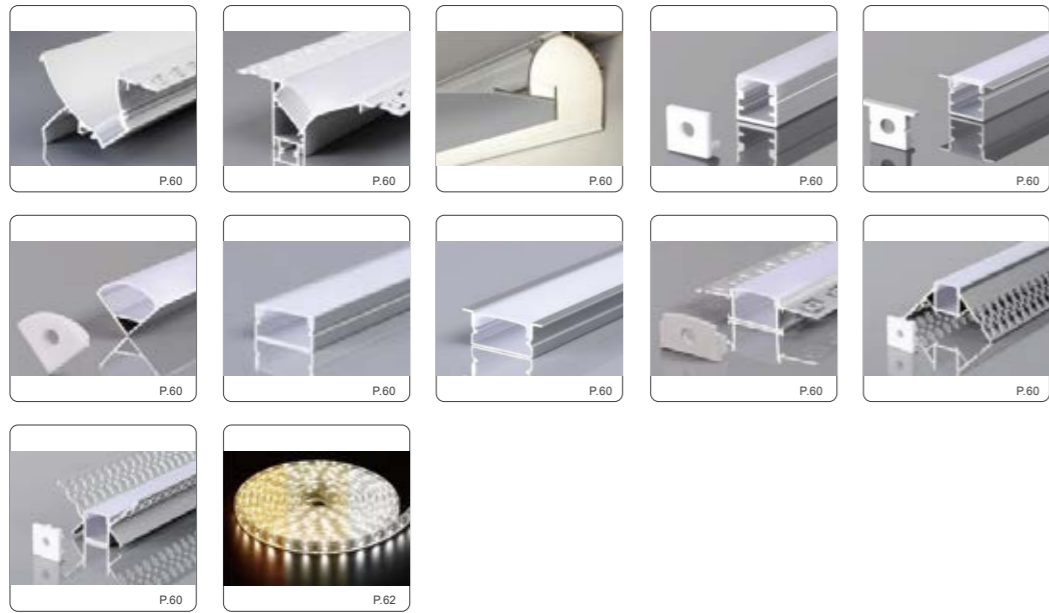

LED GROUND LIGHT



LED GROUND BURIED LIGHT



LED UNDERWATER LIGHT




LED LAWN LIGHT



LED LAWN LIGHT



Lighting calculation 4

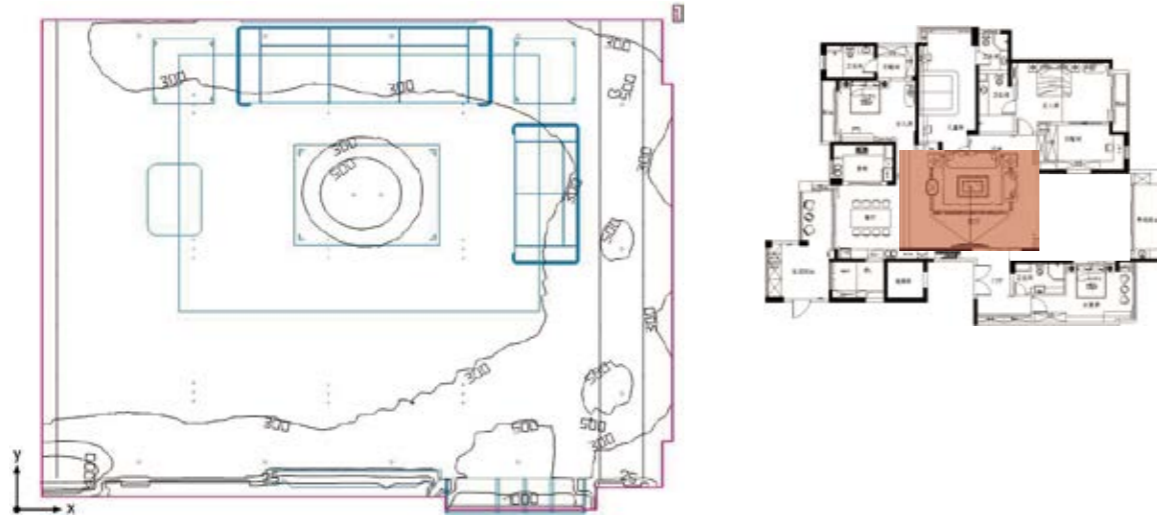


Lighting area


Surface	Result	Average target	Minimum	Maximum
1、Irradiation space	Right angle illuminance height: 0.800m	307(≥150)	0.78	2754

3D effect simulation 5



Design sketchn 6

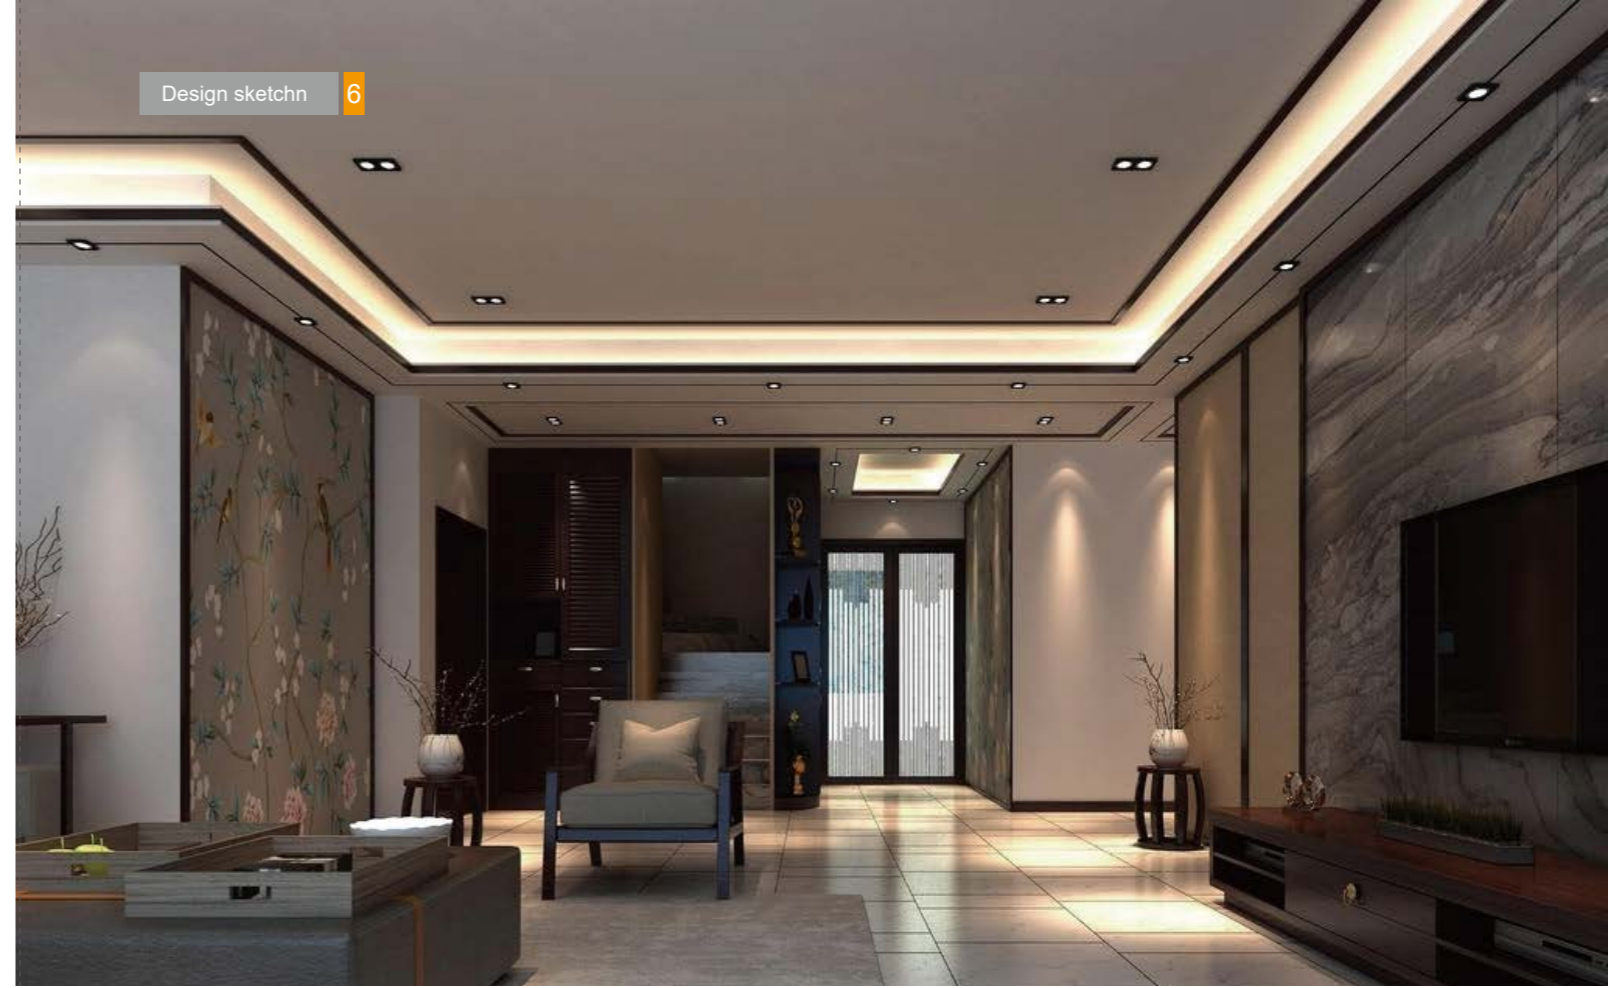

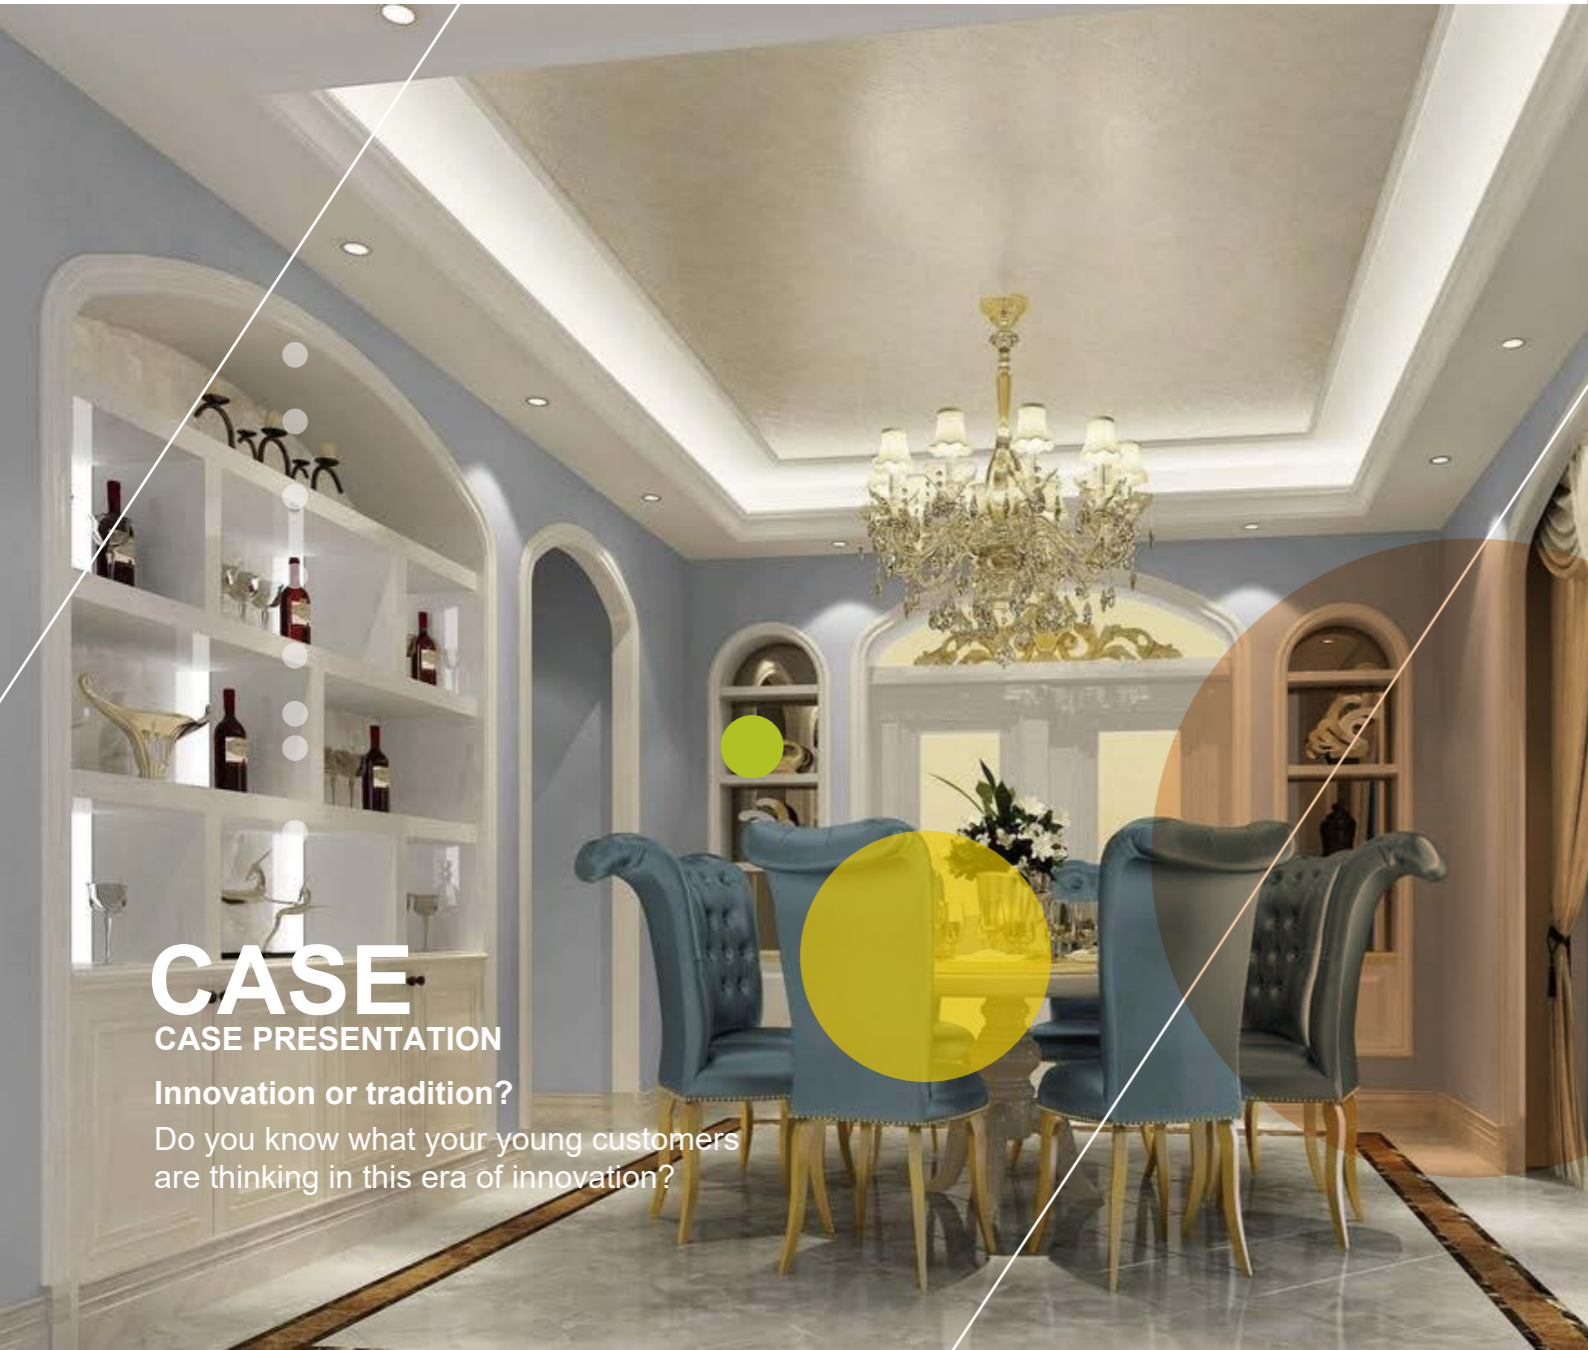


CASE

CASE PRESENTATION

Innovation or tradition?

Do you know what your young customers are thinking in this era of innovation?

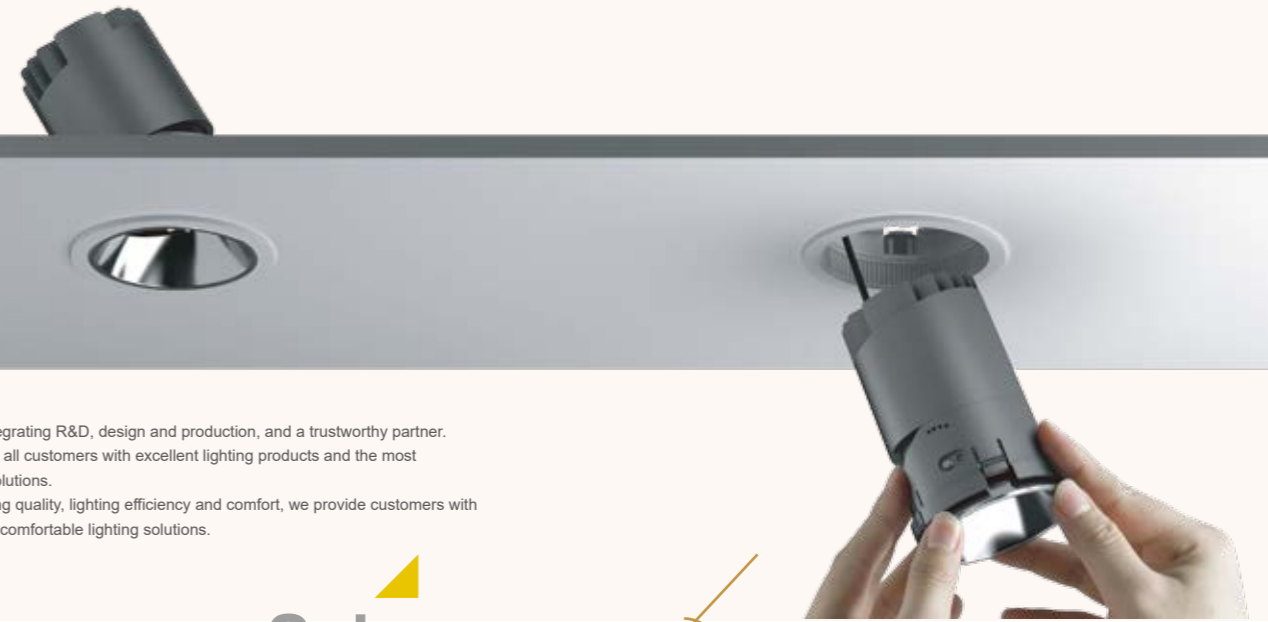

We are an enterprise integrating R&D, design and production, and a trustworthy partner. Our mission is to provide all customers with excellent lighting products and the most convenient installation solutions. While ensuring the lighting quality, lighting efficiency and comfort, we provide customers with more energy-saving and comfortable lighting solutions.

Scheme case



Ultra-thin magnetic track light

LED ULTRATHIN MAGNET LIGHT



Track light	
Model No	MS30-TL7
Wattage	7W
Ra	>90
Beam Angle	24°
Input Voltage	48V
Color	Black White
Size	36°90°145mm
CCT	3000K 4000K 5000K



Adjustable Grille light	
Model No	MS30-FD5
Wattage	10W
Ra	>90
Beam Angle	30°
Input Voltage	48V
Color	Black White
Size	140°30°105mm
CCT	3000K 4000K 5000K



Linear light	
Model No	MS30-DF300
Wattage	12W
Ra	>90
Beam Angle	105°
Input Voltage	48V
Color	Black White
Size	300°32°11mm
CCT	3000K 4000K 5000K



Acrylic light	
Model No	MS30-SA1
Wattage	6W
Ra	>90
Beam Angle	160°
Input Voltage	48V
Color	Black White
Size	48°35°60mm
CCT	3000K 4000K 5000K



Grille Light	
Model No	MS30-LB24
Wattage	10W
Ra	>90
Beam Angle	30°
Input Voltage	48V
Color	Black White
Size	240°32°11mm
CCT	3000K 4000K 5000K



Anti-glare Spotlight	
Model No	MS30-SP1
Wattage	6W
Ra	>90
Beam Angle	30°
Input Voltage	48V
Color	Black White
Size	140°30°105mm
CCT	48°35°60mm






Rotatable Round Spotlight	
Model No	MS30-DR54R
Wattage	7W
Ra	>90
Beam Angle	24°
Input Voltage	48V
Color	Black White
Size	φ54*63*98mm



Decorative chandelier	
Model No	MS30-HS7W
Wattage	7W
Ra	>90
Beam Angle	24°
Input Voltage	48V
Color	Black White
Size	φ80*85mm
CCT	3000K 4000K 5000K



Round Downlight	
Model No	MS30-DR54
Wattage	7W
Ra	>90
Beam Angle	24°
Input Voltage	48V
Color	Black White
Size	φ54*75mm
CCT	3000K 4000K 5000K

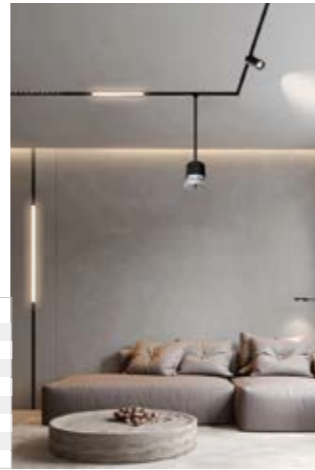

Decorative chandelier	
Model No	MS30-HC7W
Wattage	7W
Ra	>90
Beam Angle	24°
Input Voltage	48V
Color	Black White
Size	φ72*110mm
CCT	3000K 4000K 5000K



Square Downlight	
Model No	MS30-DS54
Wattage	12W
Ra	>90
Beam Angle	24°
Input Voltage	48V
Color	Black White
Size	φ55*55*75mm
CCT	3000K 4000K 5000K


ULTRATHIN MAGNET LIGHT SYSTEM

Built-in power supply

Double magnet

No snap design

freedom of movement

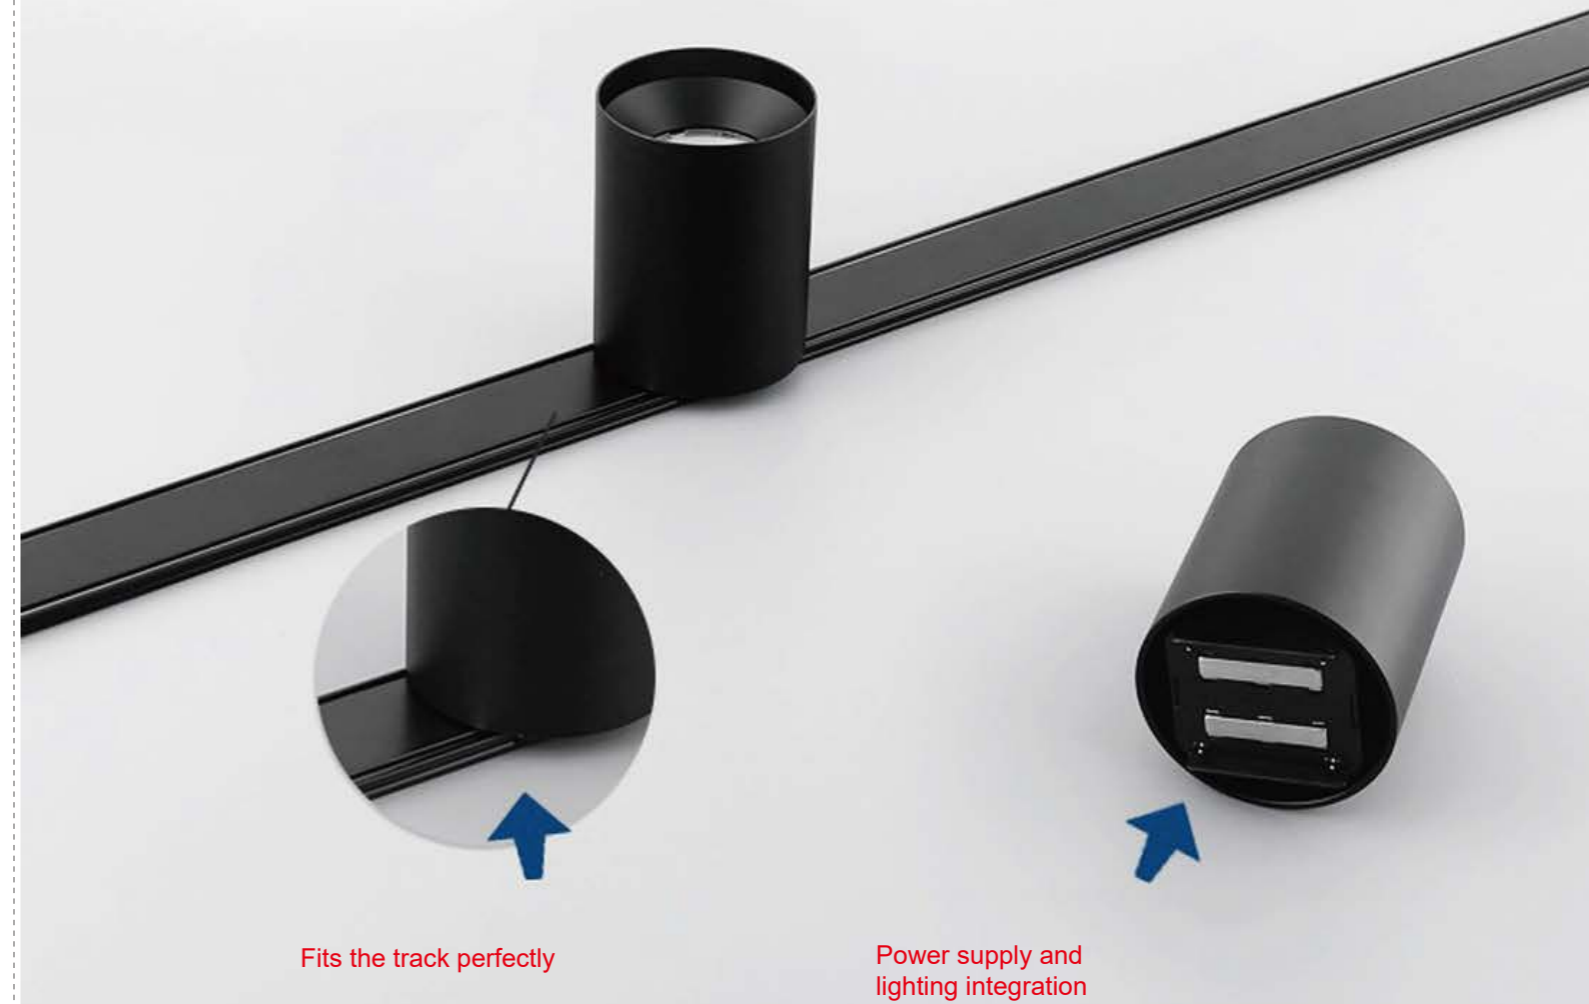



Fits the track perfectly

Power supply and lighting integration





Features




- Thickness:5mm,apply a magnet system without suspended ceiling.
- Can be cut at any length,satisfy variety design.
- Easy installation,bracket and body lock model.
- PC body with smoothly move,good insulation.

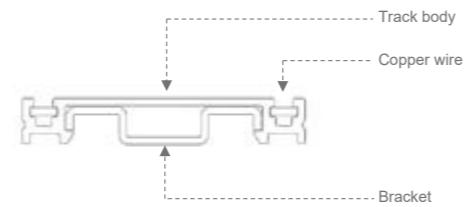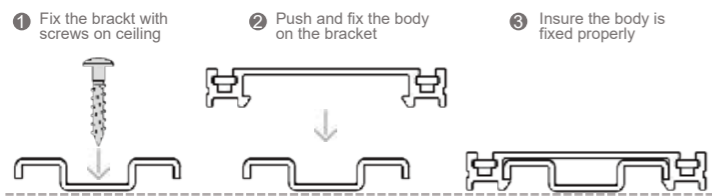



Ultrathin magnetic track	
Model No	MS30-magnetic track
Color	Black White
Material	Pc/Coppe
Size	30*5mm
Input voltage	DC 48V

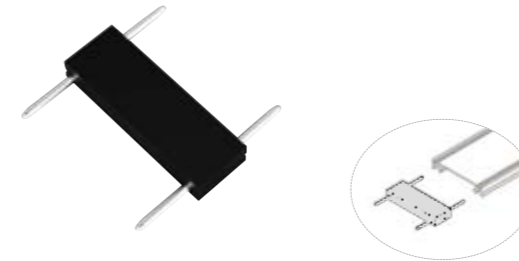

Straight Connector	
Model No	MS30-straight connector
Color	Black White
Material	Coppe
Size	30*30*5mm

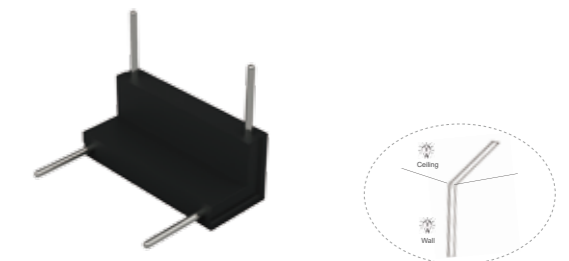



Vertical Connector	
Model No	MS30-Vertical connector
Color	Black White
Material	Coppe
Size	25*25*30mm

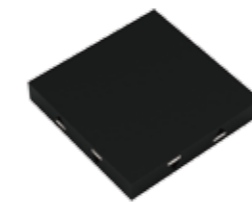

Cross Connector	
Model No	MS30L-Cross connector
Color	Black White
Material	Coppe
Size	45*45*5mm/ 60*45*5mm /60*60*5mm



Power Supply	
Model No	MS30-SP100 MS30-SP200
Color	Black White
Input voltage	DC190-245V
Output current	2.1A 4.2A
Dimension	32*31*282mm(100W) 32*31*352mm(200W)

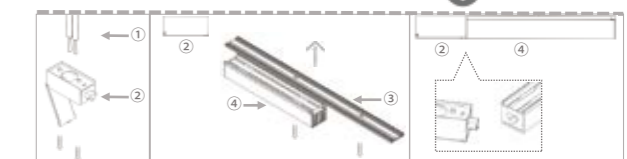

1 The external box passes through the outlet position, and the screw is fixed. 2 Fix the track screw on the external box, and the power supply is attached to the track. 3 connect power supply and complete the installation and installed.

LED MAGNETIC TRACK LIGHT



Exterior

Lighting design without the main light not only makes the light more accurate and effective



Features

Low-voltage fixed lamps convenient and fast, free to move



Safety

Safe voltage, no electric shock if you touch the track

20 SERIES
MAGNETIC STRIP
LIGHT




Model	2003-6W	2003-12W	2003-18W	2003-24W
Power	6W	12W	18W	24W
Size	103*22*25mm	203*22*25mm	301*22*25mm	400*22*25mm
Beam angle	24°			
Material	aluminum			
CCT	3000/4000/6000K			
Color	WH/BK			
Light source	OSRAM			
Ra	Ra≥90			
Input voltage	DC48V/36V			
Rail connection	Applicable to 20 series exposed/concealed/2-wire/4-wire magnetic track			

35 SERIES
MAGNETIC STRIP
LIGHT




Model	2004-1-10W	2004-1-20W	2004-1-30W	2002-1-7W	2004-2-15W	2002-2-20W
Power	10W	20W	18W	7W	15W	20W
Size	135*34*50.5mm	270*34*50.5mm	405*34*50.5mm	135*34*50.5mm	270*34*50.5mm	405*34*50.5mm
Beam angle	24°					
Material	aluminum					
CCT	3000/4000/6000K					
Color	WH/BK					
Light source	OSRAM					
Ra	Ra≥90					
Input voltage	DC48V/36V					
Rail connection	Applicable to 35 series exposed/concealed/2-wire/4-wire magnetic track					

20 SERIES
MAGNETIC STRIP
LIGHT

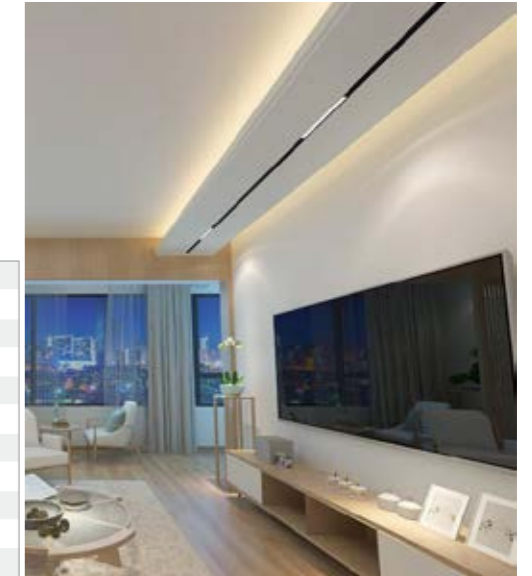

Model	2008-8W	2008-16W	2008-24W	2008-30W
Power	8W	16W	24W	30W
Size	300*22*25mm	600*22*25mm	900*22*25mm	120*22*25mm
Beam angle	110°			
Material	aluminum			
CCT	3000/4000/6000K			
Color	WH/BK			
Light source	OSRAM			
Ra	Ra≥90			
Input voltage	DC48V/36V			
Rail connection	Applicable to 20 series exposed/concealed/2-wire/4-wire magnetic track			

35 SERIES
MAGNETIC STRIP
LIGHT

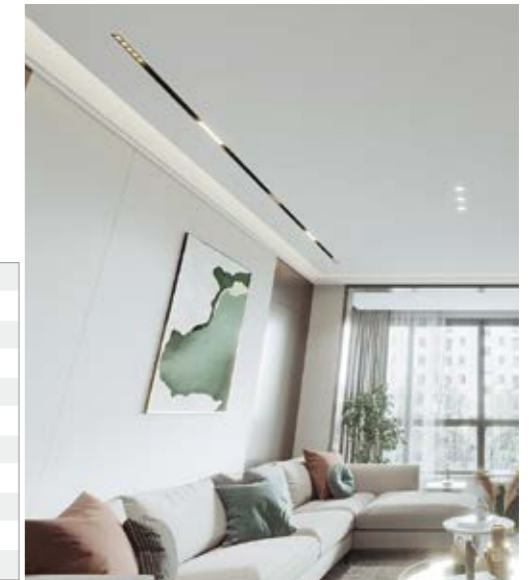

Model	2010-8W	2010-16W	2003-24W	2003-30W
Power	8W	16W	24W	30W
Size	300*34*50.5mm	600*34*50.5mm	900*34*50.5mm	120*34*50.5mm
Beam angle	110°			
Material	aluminum			
CCT	3000/4000/6000K			
Color	WH/BK			
Light source	OSRAM			
Ra	Ra≥90			
Input voltage	DC48V/36V			
Rail connection	Applicable to 35 series exposed/concealed/2-wire/4-wire magnetic track			

20 SERIES

MAGNETIC STRIP LIGHT



Model	2006-6T-6W	2006-6T-12W	2006-12T-12W
Power	6W	12W	12W
Beam angle	117°22*103mm	115°25*160mm	233°23*105mm
Beam angle	24°		
Material	aluminum		
CCT	3000/4000/6000K		
Color	WH/BK		
Light source	OSRAM		
RA	Ra≥90		
Input voltage	DC48V/36V		
Rail connection	Applicable to 20 series exposed/concealed/2-wire/4-wire magnetic track		




20 SERIES

MAGNETIC STRIP LIGHT



Model	2020-6W	2020-12W	2020-18W	2020-24W
Power	6W	12W	18W	24W
Size	120°22*61mm	220°22*61mm	320°22*61mm	420°22*61mm
Beam angle	24°			
Material	aluminum			
CCT	3000/4000/6000K			
Color	WH/BK			
Light source	OSRAM			
RA	Ra≥90			
Input voltage	DC48V/36V			
Rail connection	Applicable to 20 series exposed/concealed/2-wire/4-wire magnetic track			

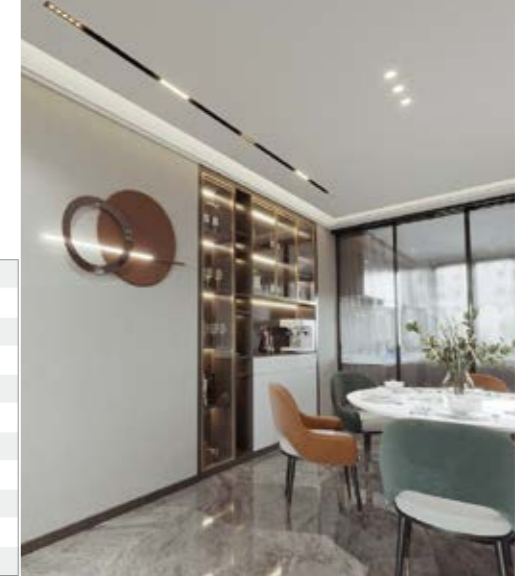

35 SERIES

MAGNETIC STRIP LIGHT



Model	2007-1-10W	2007-1-20W	2007-2-7W	2007-2-14W
Power	10W	20W	7W	14W
Size	135°33*95mm	270°33*95mm	135°33*95mm	270°33*95mm
Beam angle	24°			
Material	aluminum			
CCT	3000/4000/6000K			
Color	WH/BK			
Light source	OSRAM			
RA	Ra≥90			
Input voltage	DC48V/36V			
Rail connection	Applicable to 35 series exposed/concealed/2-wire/4-wire magnetic track			




35 SERIES

MAGNETIC STRIP LIGHT



Model	2021-6T-6W	2021-6T-12W	2021-18T-18W
Power	6W	12W	18W
Beam angle	133°33*78mm	238°33*78mm	343°33*78mm
Beam angle	24°		
Material	aluminum		
CCT	3000/4000/6000K		
Color	WH/BK		
Light source	OSRAM		
RA	Ra≥90		
Input voltage	DC48V/36V		
Rail connection	Applicable to 35 series exposed/concealed/2-wire/4-wire magnetic track		

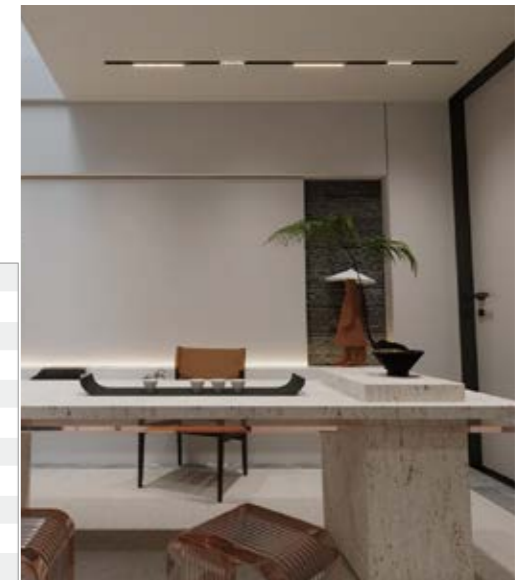

20 SERIES


MAGNETIC STRIP LIGHT



Model	2012-1-12W	2012-1-20W	2012-1-30W
Power	12W	20W	30W
Beam angle	130°50mm	163°70mm	173°80mm
Beam angle	24°		
Material	aluminum		
CCT	3000/4000/6000K		
Color	WH/BK		
Light source	OSRAM		
RA	Ra≥90		
Input voltage	DC48V/36V		
Rail connection	Applicable to 20 series exposed/concealed/2-wire/4-wire magnetic track		

20 SERIES


MAGNETIC STRIP LIGHT

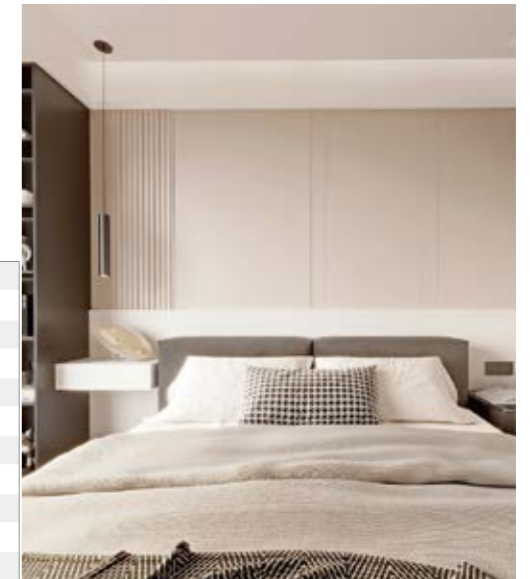

Model	20-2011-1	20-2011-2	20-2011-3
Power	8W/12W	8W/12W	8W/12W
Beam angle	50°130mm	40°300mm	40°310mm
Beam angle	180°		
Material	pc		
CCT	3000/4000/6000K		
Color	WH/BK		
Light source	OSRAM		
RA	Ra≥90		
Input voltage	DC48V/36V		
Rail connection	Applicable to 20 series exposed/concealed/2-wire/4-wire magnetic track		

20 SERIES

MAGNETIC STRIP LIGHT

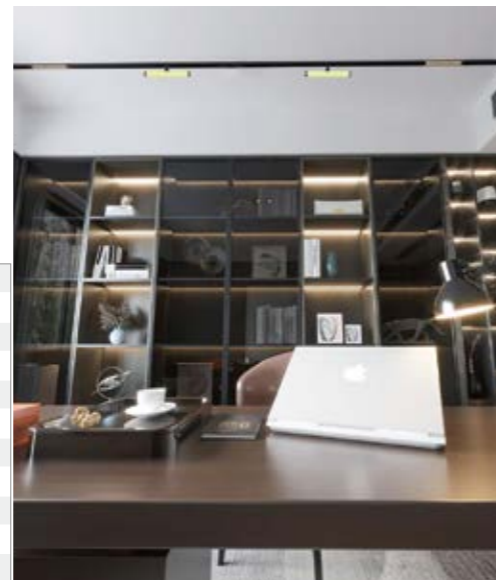


Model	2009-8W	2009-16W	2009-24W
Power	8W	16W	24W
Beam angle	300°22'25mm	600°22'25mm	900°22'25mm
Beam angle	180°		
Material	pc		
CCT	3000/4000/6000K		
Color	WH/BK		
Light source	OSRAM		
RA	Ra≥90		
Input voltage	DC48V/36V		
Rail connection	Applicable to 20 series exposed/concealed/2-wire/4-wire magnetic track		

20 SERIES


MAGNETIC STRIP LIGHT




Model	Round-8W
Power	8W
Beam angle	87°87mm
Beam angle	360°
Material	aluminum+pc
CCT	3000/4000/6000K
Color	WH/BK
Light source	OSRAM
RA	Ra≥90
Input voltage	DC48V/36V
Rail connection	Applicable to 20 series exposed/concealed/2-wire/4-wire magnetic track




Model	R20-1
Color	BK
Material	aluminum
Diameter	1000mm/1500mm/2000mm/3000mm



Model	R20-2
Color	BK
Material	aluminum
Diameter	1000mm/1500mm/2000mm/3000mm




Model	R35-2
Color	BK
Material	aluminum
Diameter	1000mm/1500mm/2000mm/3000mm



Model	R35-3
Color	BK
Material	aluminum
Diameter	1000mm/1500mm/2000mm/3000mm



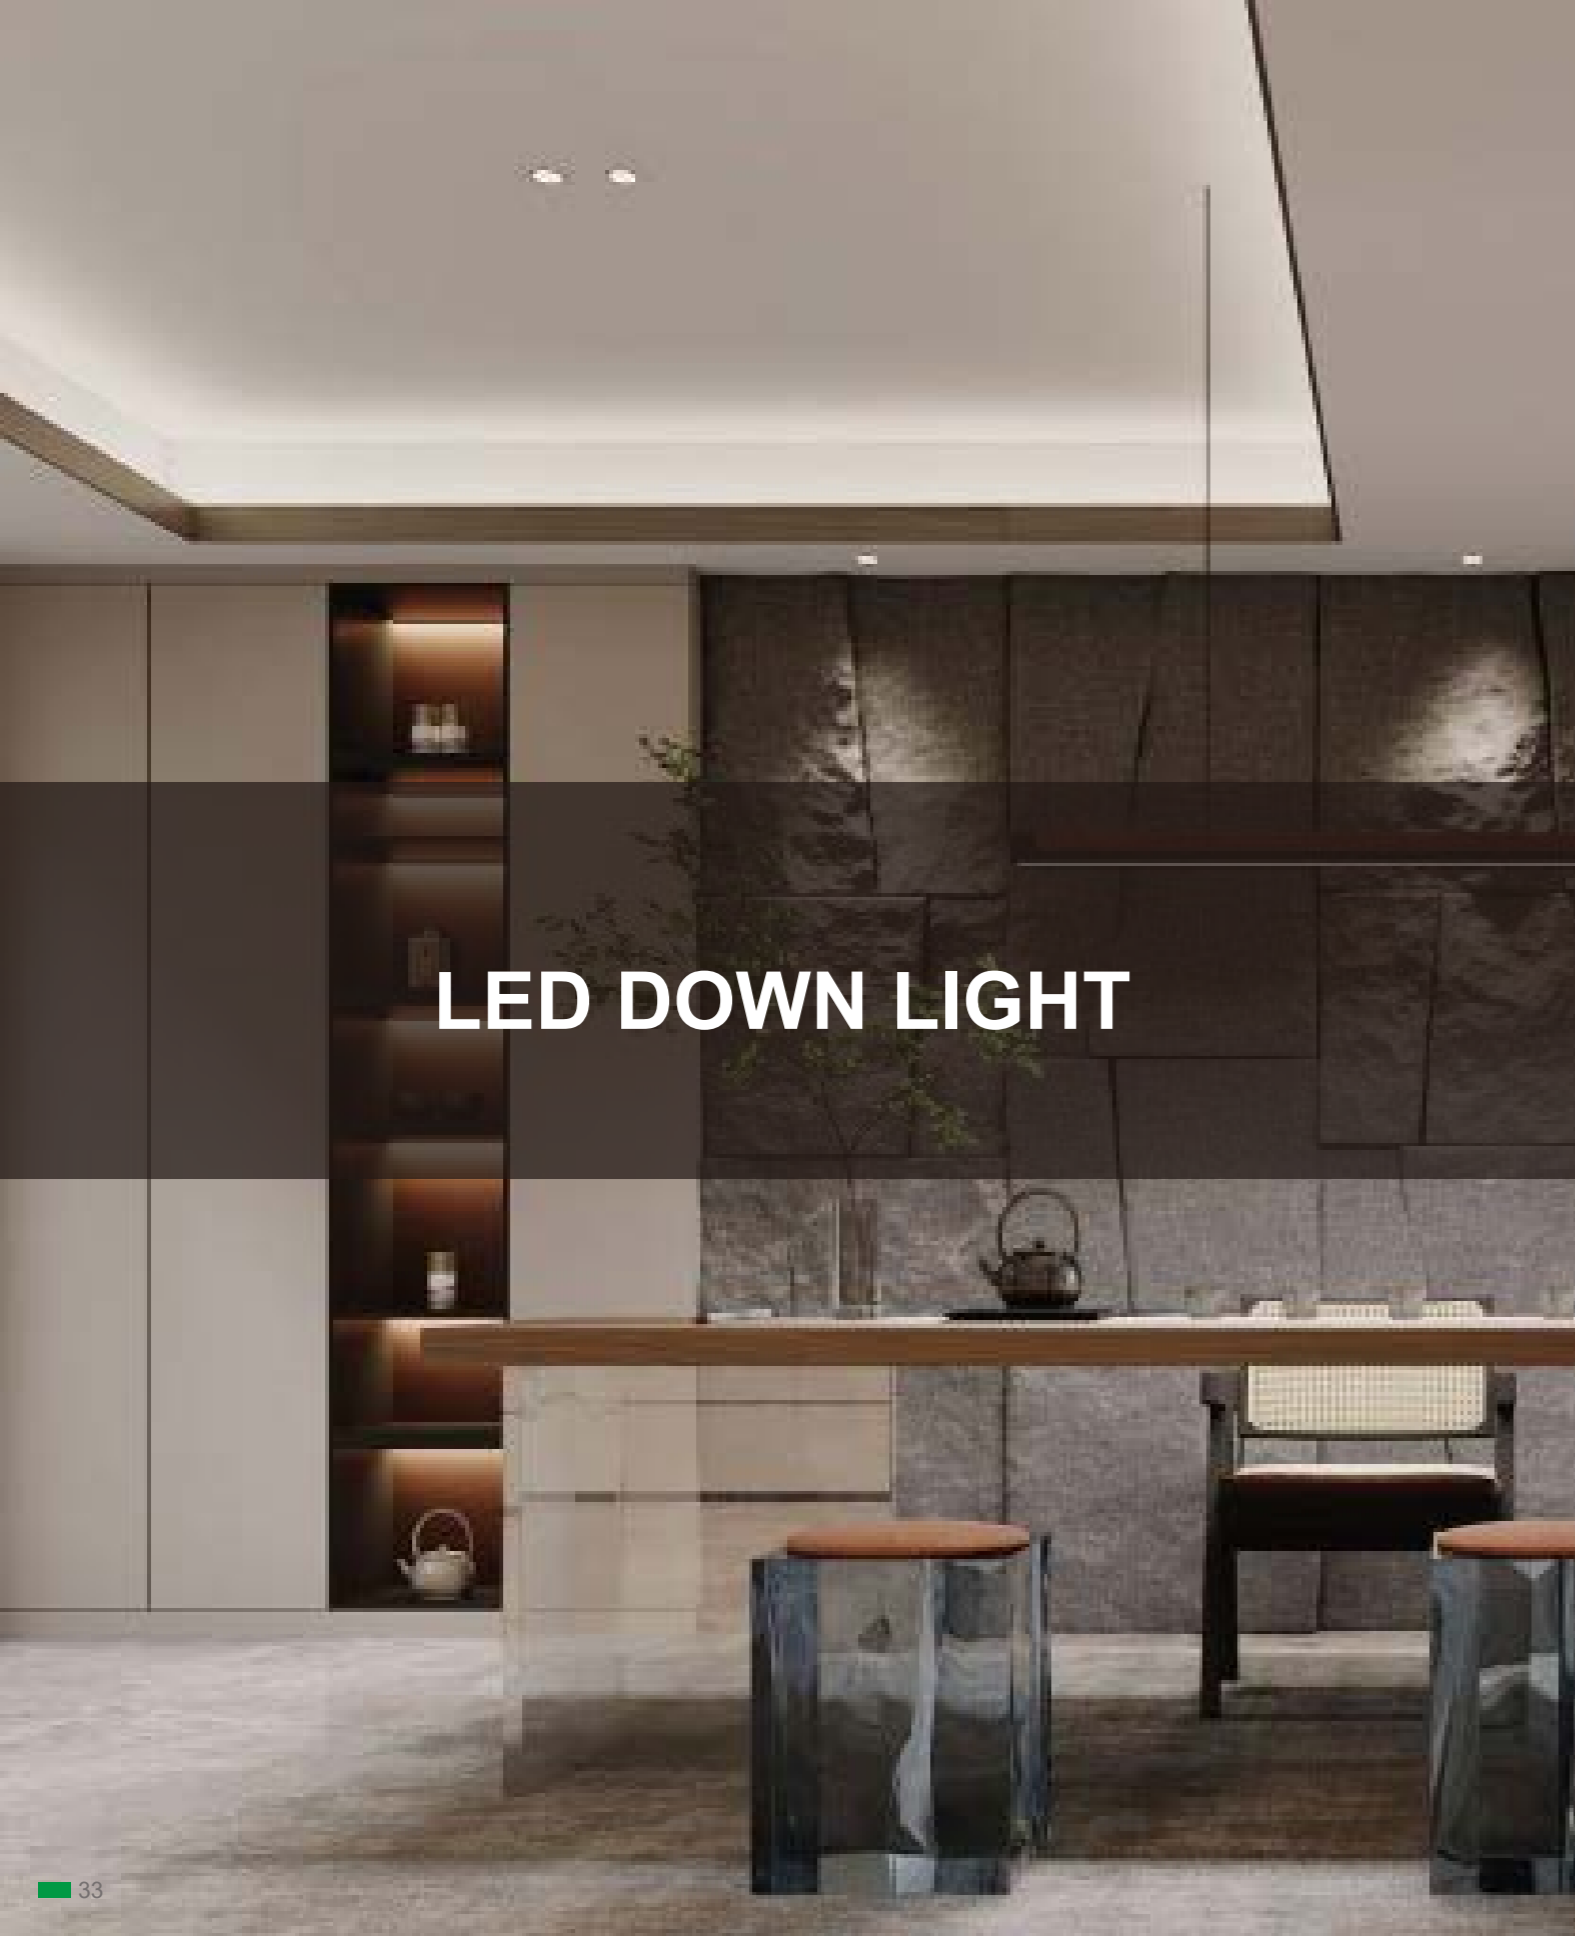

LED DOWN LIGHT



Model	D-YD-COB2-5	D-YD-COB2-7	D-YD-COB2-9
Power	5W	9W	15W
Size	64*60mm	84*78mm	104*90mm
Cut size	55mm	75mm	95mm
Beam angle	15°/24°/36°	15°/24°/36°	15°/24°/36°
CRI	Ra≥90	Ra≥90	Ra≥90
Voltage	200-240V	200-240V	200-240V



Model	T-012COB2	T-012COB2.5	T-012COB3	T-012COB3.5
Power	1-3W	5W	7W	9W
Size	38*39mm	45*51mm	57*67mm	70*79mm
Cut size	30mm	40mm	50mm	60mm
Beam angle	12°/24°/36°	12°/24°/36°	12°/24°/36°	12°/24°/36°
CRI	Ra≥90	Ra≥90	Ra≥90	Ra≥90
Voltage	200-240V	200-240V	200-240V	200-240V






Model	T-05COB2.5	T-012COB3	T-012COB3.5	T-012COB4
Power	3W	7W	12W	15W
Size	97*47mm	107*47mm	116*53mm	143*57mm
Cut size	75mm	85mm	95mm	105mm
Beam angle	36°/60°	36°/60°	36°/60°	36°/60°
CRI	Ra≥90	Ra≥90	Ra≥90	Ra≥90
Voltage	200-240V	200-240V	200-240V	200-240V




Model	YY53	YY53	YY53	YY53
Power	10W	15W	20W	30W
Size	89*H65mm	108*H73mm	129*H92mm	162*H107mm
Cut size	75mm	95mm	115mm	145mm
Beam angle	24°	24°	24°	24°
CRI	Ra≥90	Ra≥90	Ra≥90	Ra≥90
Voltage	85-265V	85-265V	85-265V	85-265V

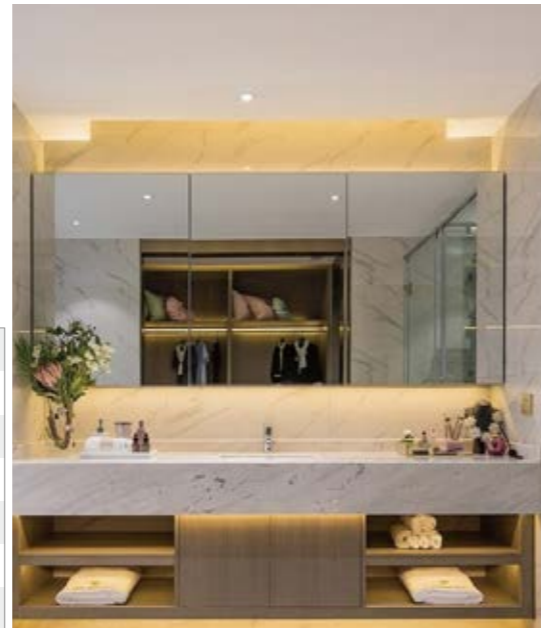

Model	YY831	YY831	YY831
Power	7W	15W	20W
Size	80*H90mm	80*H140mm	100*H160mm
Cut size	/	/	/
Beam angle	15°/30°/45°	15°/30°/45°	15°/30°/45°
CRI	Ra≥90	Ra≥90	Ra≥90
Voltage	85-265V	85-265V	85-265V



Model	YY832	YY832	YY832
Power	20W	25W	30W
Size	90*90*H160mm	100*100*H140mm	120*120*H180mm
Cut size	/	/	/
Beam angle	15°/30°/45°	15°/30°/45°	15°/30°/45°
CRI	Ra≥90	Ra≥90	Ra≥90
Voltage	85-265V	85-265V	85-265V

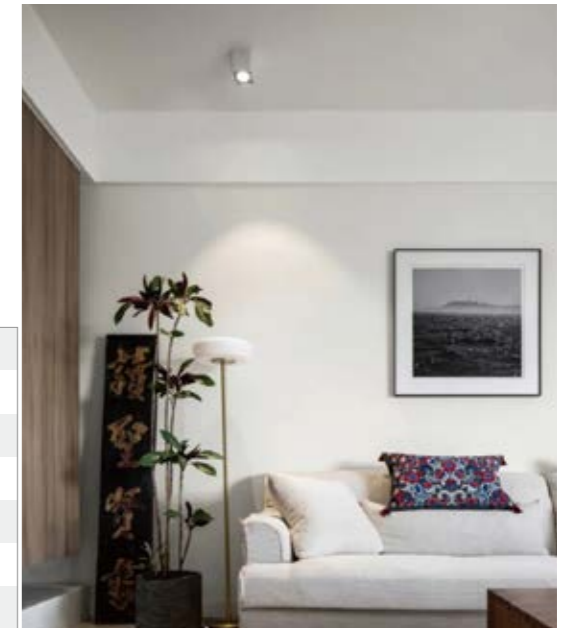



Model	D-OW-01	D-OW-02	D-OW-03	D-OW-04	D-OW-05
Power	2W	4W	10W	20W	30W
Size	45*45*49mm	75*45*49mm	147*45*49mm	280*45*49mm	412.7*45*49mm
Cut size	37*37mm	68*37mm	140*37mm	273*37mm	405*37mm
Beam angle	15°/30°/45°	15°/30°/45°	15°/30°/45°	15°/30°/45°	12°/24°/40°
CRI	Ra≥90	Ra≥90	Ra≥90	Ra≥90	Ra≥90
Voltage	200-240V	200-240V	200-240V	200-240V	200-240V




Model	D-OW-06	D-OW-07	D-OW-08
Power	10W	20W	30W
Size	136.5*34*70mm	269*34*70mm	402*34*70 mm
Cut size	/	/	/
Beam angle	15°/30°/45°	15°/30°/45°	15°/30°/45°
CRI	Ra≥90	Ra≥90	Ra≥90
Voltage	200-240V	200-240V	200-240V





LED BLUE SKY LIGHT

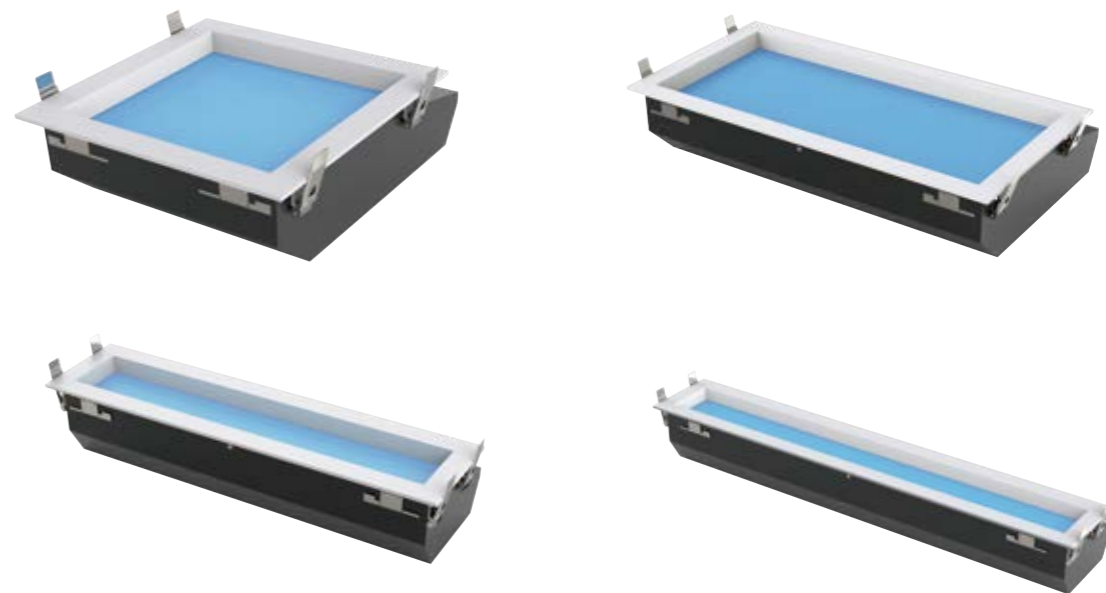

Model	D-PK-Q3030	D-PK-Q3060	D-PK-Q1560	D-PK-Q1590
Power	30W	60W	50W	70W
Size	300*300*125mm	300*600*125mm	150*600*125mm	150*900*125mm
Cut size	285*285mm	585*285mm	585*135mm	885*135mm
Beam angle	120°	120°	120°	120°
CRI	Ra≥90	Ra≥90	Ra≥90	Ra≥90
Voltage	30V/900mA	30V/1700mA	30V/1500mA	36V/1700mA





LED STAIR LIGHT



Switch type



Light perception
Human body induction

Model	CE-165	CE-165
Power	3W	3W
Size	105*40*48mm	185*40*48mm
Cut size	73*33*46mm	156*36*46mm
IP	65	
Voltage	110-240V	
Colour	Black/White/Grey/Golden	




Switch type



Light perception
Human body induction

Model	D-CE-9090A
Power	3W
Size	90*90*50mm
Cut size	76*76*52mm
IP	65
Voltage	110-240V
Colour	Black/White/Grey/Golden

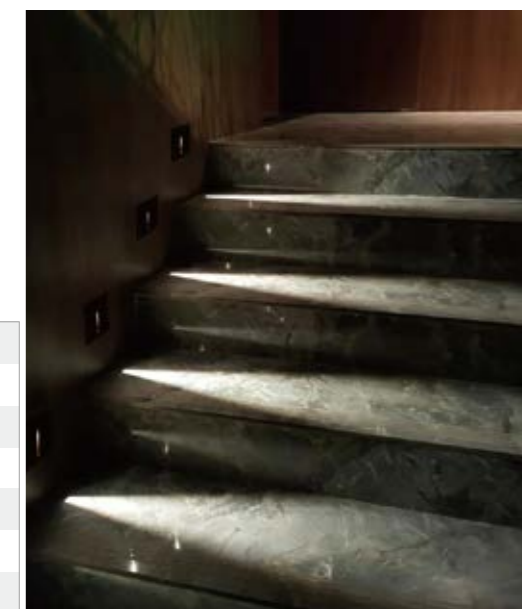




Model	CE-147	CE-147
Power	3W	5W
Size	145*52*70mm	165*62*105mm
Cut size	143*55*70mm	156*65*96mm
IP	65	
Voltage	110-240V	
Colour	Black/Pale/Dark grey	



Model	D-CE-105	D-CE-105
Power	3W	5W
Size	105*55*60mm	210*55*65mm
Cut size	100*52*55mm	200*53*55mm
IP	65	
Voltage	110-240V	
Colour	Black/White/Dark grey	



LED WALL LAMP

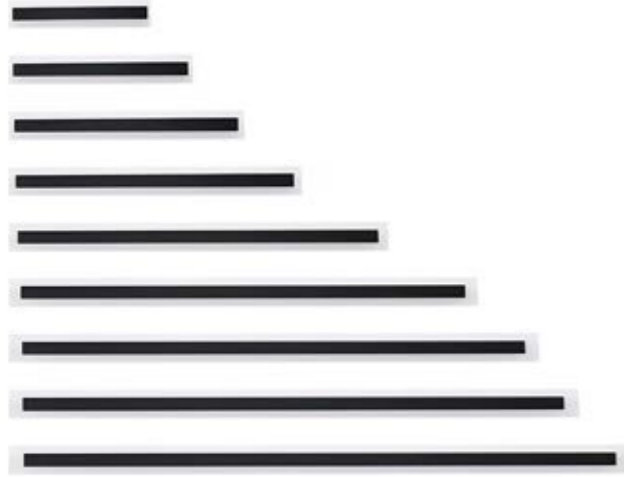

Model	DG-HD-03	DG-HD-03	DG-HD-03	DG-HD-03	DG-HD-03	DG-HD-03	DG-HD-03	DG-HD-03
Power	7W	14W	19W	23W	27W	30W	46W	55W
Size	300*40*80mm	600*40*80mm	800*40*80mm	1000*40*80mm	1200*40*80mm	1500*40*80mm	2000*40*80mm	2400*40*80mm
IP	65							
Material	Stainless steel+acrylic							
CRI	Ra≥80							
Voltage	90-250V							



Model	DG-HD-01	DG-HD-01	DG-HD-01	DG-HD-01	DG-HD-01
Power	3W*2	5W*2	12W*2	18W*2	30W*2
Size	65*160mm	90*260mm	110*300mm	145*300mm	145*450mm
Use area	5-10m ²	8-12m ²	10-15m ²	15-20m ²	18-22m ²
IP	65	65	65	65	65
CRI	Ra≥80	Ra≥80	Ra≥80	Ra≥80	Ra≥80
Voltage	85-265V	85-265V	85-265V	85-265V	85-265V



Model	DG-HD-02	DG-HD-02	DG-HD-02
Power	4W	6W	8W
Size	110*85*35mm	160*85*35mm	210*85*35mm
Use area	3-5m ²	5-8m ²	8-11m ²
IP	65	65	65
CRI	Ra≥80	Ra≥80	Ra≥80
Voltage	85-260V	85-260V	85-260V





LED LIVING ROOM PENDANT LIGHT



Model	XDY-001
Power	126W
Size	850*850*100mm
Use area	15-25m ²
Material	Lron+aluminum
CRI	Ra≥80
Colour	Golden/Black/Coffee



Model	XDY-002	XDY-002	XDY-002	XDY-002	XDY-002	XDY-002	XDY-002
Power	30W	40W	50W	70W	60W	90W	150W
Size	600mm	800mm	400+600mm	600+800mm	200+400+600mm	400+600+800mm	200+400+600+800+1000mm
Use area	5-7m ²	5-7m ²	8-15m ²	8-15m ²	10-15m ²	10-15m ²	20-35m ²
Material	Iron+aluminum						
CRI	Ra≥80						
Colour	Golden/Black/Coffee						




Model	XDY-003	XDY-003	XDY-003
Power	32W	66W	126W
Quantity	6	8	12
Use area	15-25m ²	10-20m ²	18-30m ²
Material	Iron+aluminum		
CRI	Ra≥80		
Colour	Golden/Black		




Model	XDY-004	XDY-004	XDY-004	XDY-004	XDY-004
Power	36W	54W	70W	90W	108W
Quantity	6	9	12	15	18
Use area	5-10m ²	10-15m ²	15-20m ²	20-25m ²	18-30m ²
Material	Glass+aluminum				
CRI	Ra≥80				
Colour	Golden				



Model	XDY-005	XDY-005	XDY-005	XDY-005
Power	63W	84W	105W	126W
Quantity	9	12	15	18
Use area	10-15m ²	15-20m ²	20-25m ²	25-30m ²
Material	Glass+aluminum			
CRI	Ra≥80			
Colour	Golden			

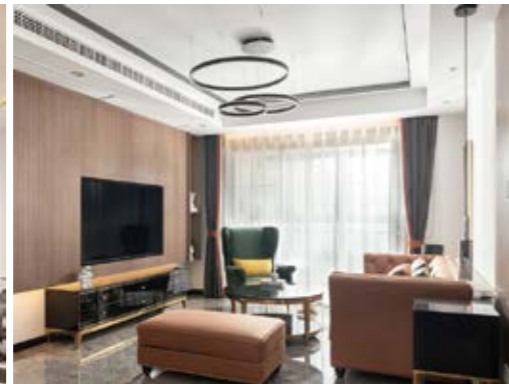

LED DINNING HALL PENDANT LIGHT

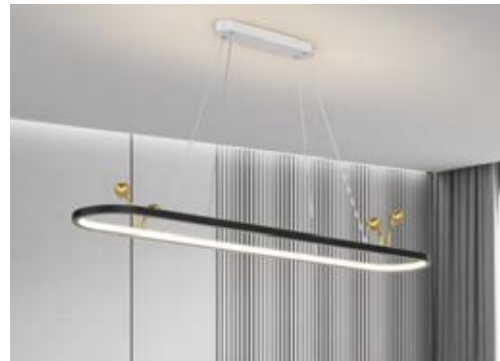

Model	D-NH-05	D-NH-05
Power	41W	54W
Size	900*220mm	1200*260mm
Use area	10-15m ²	15-20m ²
Material	Iron+aluminum+acrylic	
CRI	Ra≥80	
Colour	Golden/Black	



Model	D-NH-01
Power	45W
Size	1000mm
Use area	10-15m ²
Material	Iron+aluminum+acrylic
CRI	Ra≥80
Colour	Golden/Black



Model	D-NH-05	D-NH-05
Power	60W	64W
Size	1000*W80*H350mm	1200*W80*H350mm
Use area	8-12m ²	8-15m ²
Material	Iron+aluminum+acrylic	
CRI	Ra≥80	
Colour	Golden/Black	



Model	XDY-006
Power	5W*5
Quantity	5
Use area	10-15m ²
Material	Iron+aluminum
CRI	Ra≥80
Colour	Golden/Black



Model	XDY-007
Power	32
Size	950*250mm
Use area	10-15m ²
Material	Iron+aluminum+acrylic
CRI	Ra≥80
Colour	Golden/Black



Model	XDY-008	XDY-008	XDY-008
Power	32W	38W	46W
Size	800*100mm	1000*120mm	1200*140mm
Use area	5-15m ²	10-18m ²	15-25m ²
Material	Iron+aluminum		
CRI	Ra≥80		
Colour	Golden/Black		



LED BEDSIDE LIGHT



Model	XDY-009	
Power	24W	
Size	150*300mm	
Use area	5-8m ²	
Material	Iron++acrylic	
CRI	Ra≥80	
Colour	Golden/Black	



Model	XDY-010	
Power	20W	
Size	40*400mm	
Use area	3-8m ²	
Material	Iron++acrylic	
CRI	Ra≥80	
Colour	Golden/Black	




Model	XDY-011	
Power	6W	
Size	40*300mm	
Use area	3-8m ²	
Material	Iron++acrylic	
CRI	Ra≥80	
Colour	Golden/Black	



Model	XDY-012	XDY-012
Power	8W	16W
Size	180mm	280mm
Use area	5-10m ²	6-12m ²
Material	Iron+acrylic	
CRI	Ra≥80	
Colour	Golden/Black	



LED STAIR PENDANT LIGHT

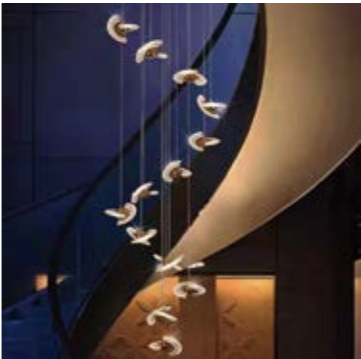

Model	XDY-013	XDY-013	XDY-013	XDY-013	XDY-013	XDY-013
Power	25W	30W	35W	40W	45W	60W
Quantity	5	6	7	8	9	12
Use area	5-12m ²	6-10m ²	7-15m ²	7-20m ²	8-25	9-30m ²
Material	Iron+aluminum					
CRI	Ra≥80					
Remarks	Customizable according to customer requirements					



Model	XDY-014	XDY-014	XDY-014	XDY-014	XDY-014	XDY-014
Power	15W	18W	21W	24W	27W	36W
Quantity	5	6	7	8	9	12
Use area	3-8m ²	4-10m ²	5-12m ²	6-12m ²	6-13m ²	7-15m ²
Material	Stainless steel+crystal					
CRI	Ra≥80					
Remarks	Customizable according to customer requirements					



Model	XDY-015	XDY-015	XDY-015	XDY-015	XDY-015	XDY-015
Power	18W	27W	36W	54W	75W	90W
Quantity	6	9	12	18	25	30
Use area	5-10m ²	6-12m ²	7-15m ²	9-20m ²	10-22m ²	12-25m ²
Material	Iron+aluminum					
CRI	Ra≥80					
Remarks	Customizable according to customer requirements					



LED CELLING LIGHT



Model	XDY-016
Power	240W
Size	1100*700mm
IP	20
Material	Acrylic
CRI	Ra≥80
Colour	Golden/Black/White



Model	XDY-017
Power	120W
Size	500mm
IP	20
Material	Acrylic
CRI	Ra≥80
Colour	Golden/Black/White



Model	XDY-018
Power	120W
Size	500mm
IP	20
Material	Acrylic
CRI	Ra≥80
Colour	Golden/Black/White



Model	XDY-019
Power	120W
Size	550mm
IP	20
Material	Acrylic
CRI	Ra≥80
Colour	Golden/Black/White




Model	XDY-020
Power	180W
Size	950*650mm
IP	20
Material	Acrylic
CRI	Ra≥80
Colour	Black/White



LED LINE LIGHT




D-XH-046



D-XH-047




D-XH-048




D-XH-023





D-XH-001




D-XH-002



D-XH-017




D-XH-017B





D-XH-045



D-XH-039



D-XH-040

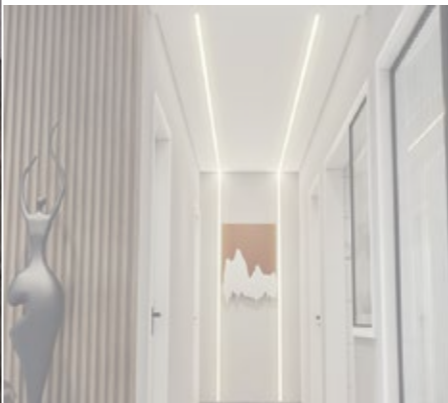



LED STRIP LIGHT

High brightness chip

Improve the luminous efficiency of led chips, arrange them in a scientific way, emit light evenly, and display colors naturally and brightly

Good conductivity

Scientific array chip

Anti death bead design

Model	2835	2835	5050
Power	5W	10W	20W
LED qty	120pcs	180pcs	60pcs
Width	8mm	11mm	10mm
Beam angle	180°	180°	180°
CRI	Ra≥90	Ra≥90	Ra≥90
Voltage	12V	12V	12V



LED GROUND LIGHT



Model	ZZ-001	ZZ-002
Power	10-20W	10-20W
Size	150*90*400mm	150*90*230mm
Beam angle	38°	
IP	65	
Voltage	DC12/24V	
Colour	Black	



Model	ZZ-003	ZZ-004
Power	5-15W	5-15W
Size	145*65*380mm	178*65*380mm
Beam angle	38°	
IP	65	
Voltage	DC12/24V	
Colour	Black	






LED GROUND BURIED LIGHT



Model	ZZ-005	ZZ-005	ZZ-006	ZZ-006
Power	3W	6W	1W	3W
Size	85*H95mm	130*H95mm	60*H100mm	75*H110mm
Cut size	80mm	120mm	56mm	65mm
IP	65			
CRI	Ra≥80			
Voltage	DC12/24V			

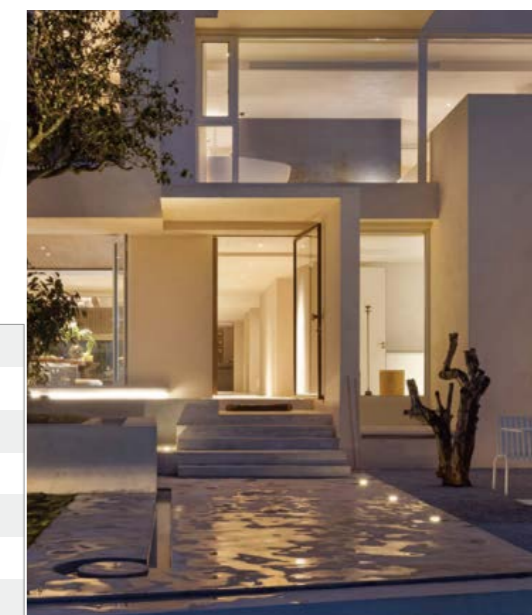

Model	ZZ-007	ZZ-007	ZZ-007	ZZ-007	ZZ-007
Power	1W	3W	5W	6W	9W
Size	85*H95mm	100*H100mm	120*H100mm	120*H100mm	150*H100mm
IP	68				
CRI	Ra≥80				
Voltage	DC12/24V				
Colour	Pure white/Warm white/Red/Blue/RGB				



LED UNDERWATER LIGHT



Model	ZZ-008	ZZ-008
Power	12W/18W	25W/35W
Size	230*49mm	295*70mm
Beam angle	15°/30°/45°/60°	
	68	
Voltage	DC12/24V	
Colour	Pure white/Warm white/Red/Blue/RGB	



Model	ZZ-009
Power	6W/9W/12W
Size	230*49mm
Beam angle	15°/30°/45°/60°
	68
Voltage	DC12/24V
Colour	Pure white/Warm white/Red/Blue/RGB





Model	ZZ-010	ZZ-010	ZZ-010	ZZ-010	ZZ-010
Power	3W	6W	9W	12W	15W
Size	85*95*150mm	120*90*115mm	145*95*185mm	160*95*195mm	180*95*195mm
IP	68				
CRI	Ra≥80				
Voltage	DC12/24V				
Colour	Pure white/Warm white/Red/Blue/RGB				



LED LAWN LIGHT





Model	ZZ-011
Power	12W
Size	180*H300-800mm
Voltage	AC100-265V
Current	300mA
IP	65
CRI	Ra≥80



Model	ZZ-012
Power	7W
Size	108*H300-800mm
Voltage	AC100-265V
Current	300mA
IP	65
CRI	Ra≥80



Model	ZZ-013
Power	12W
Size	150*50*H600-800mm
Voltage	AC100-265V
Current	300mA
IP	65
CRI	Ra≥80



Model	ZZ-014
Power	5W
Size	50*50*H300-800mm
Voltage	AC100-265V
Current	300mA
IP	65
CRI	Ra≥80



LED SOLAR STREET LIGHT



Model	ZZ-015	ZZ-015	ZZ-015	ZZ-015
Power	60W	800W	1000W	1200W
Size	350*80*453mm	605*80*350mm	680*85*350mm	760*85*350mm
Battery	3.2V/15000ma	3.2V/20000ma	3.2V/25000ma	3.2V/30000ma
PV panel	6V/18W	6V/25W	6V/30W	6V/36W
IP	65			
Function	Light control+remote control+human body sensing			

